


OERSTED WALL CURVE



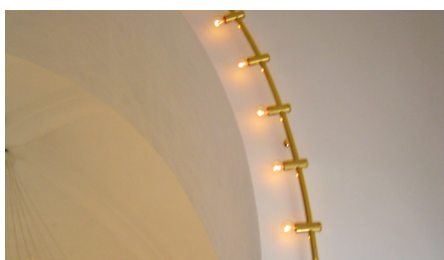

OERSTED WALL CURVE

The OERSTED wall curve can be adjusted individually with regard to shape, size, number of sockets, material, and surface coating. As it can be adjusted exactly after wishes, needs, and lighting demands, the flexibility of the fixture makes it suitable for almost any type of room.

Produkt: OERSTED WALL CURVE

Material & finish: Lacquered brass - polished or matt.

Light sources: From 5 to 18 bulbs. Socket/holder: E14. Wattage: Max. 60 W. 230 V.

Lysteknik: Freely radiating light sources that, with their close placement to the mounting surface, utilize it as a reflector.

Suspension: Mounted on the wall

Safety classifications: I.

Ingress protection: IP20.

Approval: CE-marking.

Remark: Distance between light sources: 22.5 cm. Customized solutions available upon request.

Design: Andersen Light Design

Latest update: 28/02-2025