


DYBBØL CEILING WITH ADJUSTABLE JOINT



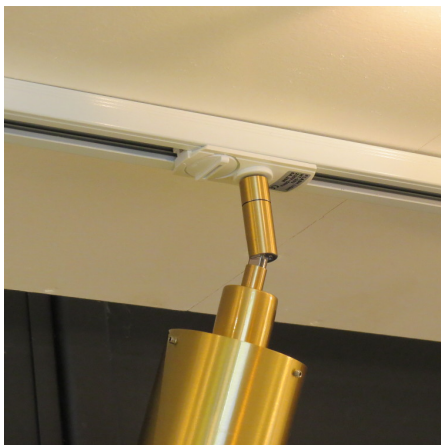

DYBBØL CEILING WITH ADJUSTABLE JOINT

The DYBBØL CEILING fixture is a discreet and well-designed ceiling luminaire that, with its replaceable GU10 light sources, can be used to create optimal lighting arrangements in all types of spaces. Its minimalist design blends seamlessly into any architectural setting.

The DYBBØL CEILING with adjustable joint is a flexible fixture that allows light distribution to be individually adjusted, either to highlight architectural details or to create dynamic lighting effects.

The light sources are available with various beam angles, color temperatures, CRI options, and dimming capabilities, allowing for the optimization of lighting quality.



Produkt: DYBBØL CEILING WITH ADJUSTABLE JOINT

Material & finish: Polished, lacquered and matt brass, grafital grey or white lacquered (RAL 9010).

Dimension: Shade: Ø7,6cm. H: 16 cm.

Light sources: Reflector lamp. Socket/holder: GU10. Wattage: Max. 75 W. 230 V.

Lysteknik: The spot fixture is steplessly adjustable and is equipped with GU10 reflector light sources. As these are available with various beam angles, color temperatures, CRI options, and dimming capabilities, the flexibility is in place to create perfect lighting solutions.

Suspension: Mounting on a PL-junction box. Can also be mounted on a GLOBAL 1-F track

Safety classifications: I.

Ingress protection: IP20.

Approval: CE-marking

Design: AndersenLysdesign

Latest update: 28/02-2025